

THIRD-ORDER HORIZONTAL CONTROL  
NORTH AMERICAN DATUM OF 1927

41-073-14  
CORNWALL QUADRANGLE  
27 CONN.-39 N.Y.  
N4145-W7315/15  
DIAGRAM NK 18-9  
HARTFORD

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Dutchess County, New York;  
Litchfield County, Conn.

Final adjustment of 1974


Edition of 12/13/74

PR: CRV/sws

Plane coordinates are based on  
Lambert projection, Conn.  
Zone

Only the permanent marks are  
listed for lines run more  
than 25 years before edition  
date and are not shown on  
sketch

SHEFFIELD  
(35 CONN.-48 N.Y.)

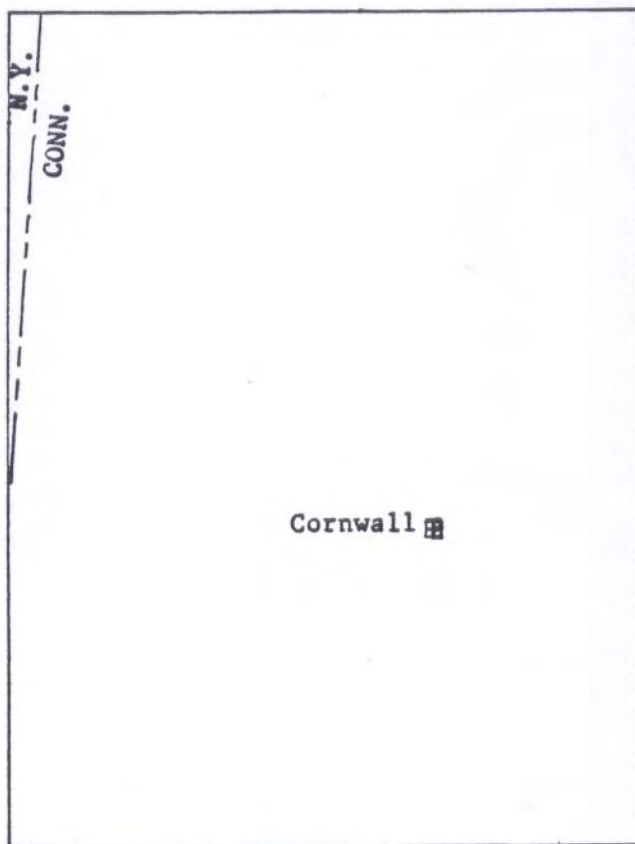

MILLBROOK  
(40 N.Y.-28 CONN.)

WINSTEAD  
(26)

X = 395,338  
Y = 334,888

NEW MILFORD  
(19)

## DISCLAIMER

We no longer attest to the validity of the positions listed for horizontal control established by transit traverse procedures. This control is now considered OBSOLETE and is included in this list for the purpose of identification only.

INDEX OF PERMANENT MARKS

MARK (USGS)

PAGE NO.

210 W 1923 628	3
TT 9 CIH 1942	3
TT 10 CIH 1942	3
TT 11 CIH 1942	3
TT 12 CIH 1942	3
TT 13 CIH 1942	3
TT 14 CIH 1942	3
TT 15 CIH 1942	3
TT 17 CIH 1942	4
TT 18 CIH 1942	4
TT 19 CIH 1942	4

STATION	DESCRIPTION PLANE COORDINATES, FEET	LATITUDE			LONGITUDE		
		°	'	"	°	'	"

Obsolete control established more than 25 years prior to edition date. To be used only to locate permanent marks in the field.

By C. I. Hudson, 1942; Book D4372

Amesville, 1.7 mi N. of, along dirt rd. that parallels Housatonic River; on W. side; 430 ft S. of dirt rd. W.; 27 ft W. of centerline of rd.; 6 ft inside pasture fence; about 5 ft above rd. level; in boulder; standard tablet stamped "TT 9 CIH 1942"

X = 430,292	Y = 420,090	41 59 04.45	73 22 27.01
-------------	-------------	-------------	-------------

Falls Village, on W. side of Main Street; at front entrance of Iron State Bank; at S. side of door; in top step; standard tablet stamped "210 W 1923 628"

X = 432,702	Y = 409,440	41 57 19.42	73 21 54.10
-------------	-------------	-------------	-------------

Falls Village, 0.45 mi E. and 2.7 mi S. to culvert; about 250 ft S. of Salisbury-Sharon Town line; 7 ft S. and 17 ft W. of center of culvert; in N. end of W. headwall; standard tablet stamped "TT 10 CIH 1942"

X = 432,015	Y = 395,425	41 55 00.92	73 22 01.86
-------------	-------------	-------------	-------------

West Cornwall, 0.2 mi W. of, along State Highway 128 and 2.45 mi S. along U.S. Highway 7; 21 ft W. of centerline of hwy.; near 14-in. cherry tree; in large boulder; standard tablet stamped "TT 11 CIH 1942"

X = 428,470	Y = 367,922	41 50 28.96	73 22 46.10
-------------	-------------	-------------	-------------

Cornwall Bridge, 1.2 mi SW. of, along U.S. Highway 7 to State Highway 45, thence 0.85 mi E.; 62 ft N. of intersection of dirt rd. NE.; in large outcrop about 5 ft above ground level; standard tablet stamped "TT 12 CIH 1942"

X = 430,485	Y = 352,183	41 47 53.62	73 22 17.99
-------------	-------------	-------------	-------------

Milton, 1.0 mi SE. of, along macadam rd., thence 2.0 mi NNW. to wooden bridge over Marshepaug River; 180 ft along rd. S. to bridge; 30 ft E. of centerline of rd.; in boulder; standard tablet stamped "TT 13 CIH 1942"

X = 461,132	Y = 348,512	41 47 19.33	73 15 33.10
-------------	-------------	-------------	-------------

Milton, 3.7 mi N. of; 3.2 mi E. of East Cornwall; 1.5 mi SW. of West Goshen; 0.3 mi S. of cemetery; 51 ft N. of S.N.E.T. Co. pole 1049; 24 ft E. of centerline of rd.; in outcrop; standard tablet stamped "TT 14 CIH 1942"

X = 460,603	Y = 356,209	41 48 35.34	73 15 40.69
-------------	-------------	-------------	-------------

Sharon, about 8 mi S. and 1 mi W. of (airline); 0.2 mi N. and 1 mi W. of Fuller Pond; on rd. up Macedonia Brook; 26 ft W. of, and 8 ft higher than center of rd.; in large outcrop; standard tablet stamped "TT 15 CIH 1942"

X = 396,332	Y = 341,070	41 46 01.16	73 29 47.60
-------------	-------------	-------------	-------------

STATION	DESCRIPTION	LATITUDE	LONGITUDE
	PLANE COORDINATES, FEET	° ' "	° ' "

OBSOLETE MARKS (Cont'd.)

Cornwall Hollow, 3.5 mi N. of, along State Highway 43 and rd. over summit to Wangum Lake; 70 ft S. of center of bridge; 12 ft E. of centerline of rd.; in large boulder; standard tablet stamped "TT 17 CIH 1942"

X = 459,027      Y = 401,214      41 55 59.86      73 16 05.06

Cornwall Hollow, 5.2 mi N. of, along State Highway 43 and rd. over summit to Wangum Lake; 27 ft W. of, and 5 ft higher than centerline of rd.; in ledge; standard tablet stamped "TT 18 CIH 1942"

X = 462,169      Y = 409,104      41 57 17.10      73 15 24.09

Cornwall Hollow, 7.5 mi N. of, along State Highway 43 and rd. over summit to Wangum Lake; about 3.8 mi NE. of South Canaan; 0.4 mi W. of S. end of Wangum Lake; 56 ft N. and 22 ft W. of intersection; about 3 ft above ground level; in large boulder; standard tablet stamped "TT 19 CIH 1942"

X = 457,665      Y = 416,029      41 58 26.13      73 16 24.26