

THIRD-ORDER LEVELING
SEA LEVEL DATUM OF 1929

MILFORD QUADRANGLE
163 PA.-31 N.Y.-55 N.J.
N4115-W7445/15
DIAGRAM NK 18-8
SCRANTON

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Pike County Pa.; Orange and Sullivan Counties,
N.Y.; Sussex County, N. J.

Only the permanent marks
are listed for lines
run more than 25 years
before edition date

Final adjustment of 1971


Edition of 8/8/72

PR: GwK'jyk

WHITE LAKE
(37 N.Y.-187 PA.)

HAWLEY
(164)

PORT JERVIS
(162 PA.-30 N.Y.-54 N.J.)

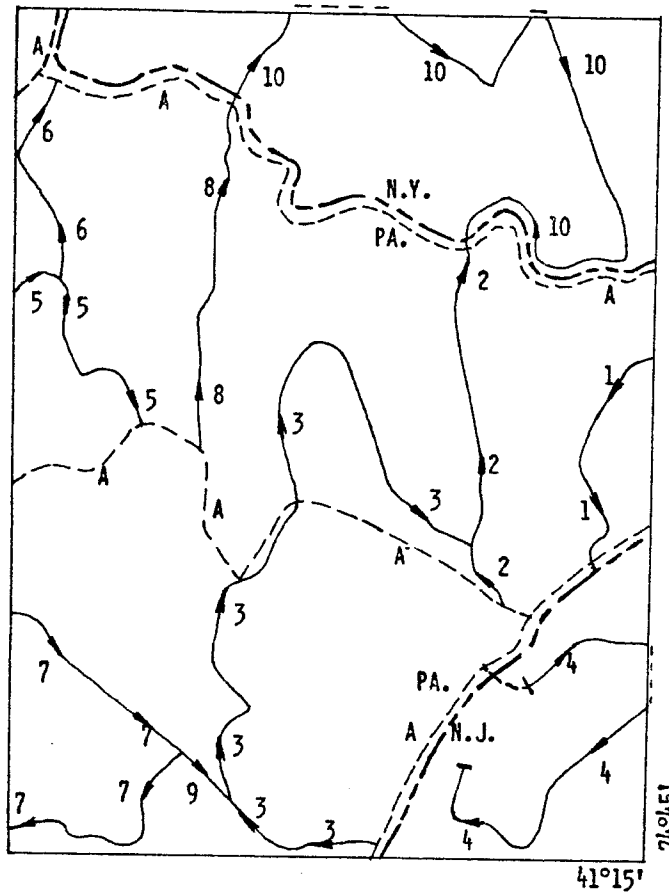

WALLPACK
(138 PA.-51 N.J.)

INDEX OF PERMANENT MARKS

<u>MARK (USGS)</u>	<u>PAGE NO.</u>	<u>MARK (USGS)</u>	<u>PAGE NO.</u>
503 ALBANY ADJ 1903	3	7 HBC 1964 1219	11
425	3	8 HBC 1964 1289	11
828	3	9 HBC 1964 410	11
1055	3	10 HBC 1964 1454	11
1189	3	11 HBC 1964 1467	11
1294	3	12 HBC 1964 1403	12
1295	3	13 HBC 1964 1169	12
1369	3	14 HBC 1964 904	12
1393	3	15 HBC 1964 693	12
PTS NO 1 1913	3	16 HBC 1964 522	12
PTS NO 2	3	17 HBC 1964 493	12
C 91 1921 503	4	18 HBC 1964 501	12
131 FAD 1957 924	3	19 HBC 1964 516	12
132 FAD 1957 1219	4	20 HBC 1964 515	12
133 FAD 1957 892	4,6	21 HBC 1964 539	12
134 FAD 1957 1385	5		
135 FAD 1957 883	5		
136 FAD 1957 930	5,11	<u>PDH</u>	
137 FAD 1957 1003	5		
139 FAD 1957 1280	6	438 (P.D.H.)	4
140 FAD 1957 1169	6	138 FAD 1957 USGS	5
142 FAD 1957 1372	6	141 FAD 1957 USGS	6
143 FAD 1957 1181	6	10 DSW 1963 USGS	8
144 FAD 1957 618	7	21 DSW 1963 USGS	10
145 FAD 1957 774	7		
146 FAD 1957 658	7	<u>NGS AND STATE SURVEY</u>	
147 FAD 1957 624	7		
148 FAD 1957 460	7	NOT STAMPED (473.350)	7
11 DSW 1963	8	2482	7
12 DSW 1963 1063	9		
17 DSW 1963 1361	9	<u>NGS</u>	
18 DSW 1963 1311	9		
19 DSW 1963 1342	9,11	M 10 1932 402.348	5
20 DSW 1963 1285	10	P 10 1932	5,12
23 DSW 1963 1375	10	W 149 1941	9
24 DSW 1963 1336	10	Y 149 1941	11
25 DSW 1963 793	10	Z 149 1941	10
1 HBC 1964 655	11	L 236 1959	10
2 HBC 1964 814	11	M 236 1959	8

Books A 9252, B 1940 and B 2131; Bulletins 671 and 515

	<u>Feet</u>
ISOLATED BENCH MARKS (By G. M. Dimmick, 1904; Bulletin 671, F. K. Maxcy, 1913; Book A 9252, and Bulletin 515, R. G. Clinite, 1924; Book B 1940, M. A. Roudabush, 1925; Book B 2131)	
Mongaup; top of N. abutment of hwy. bridge over Mongaup Creek; standard tablet stamped "503 ALBANY ADJ 1903"	503.031
Matamoras, 2.0 mi SW. of; on Milford Pike; N. end of W. abutment of concrete hwy. bridge; in angle of coping stone; standard tablet stamped "425"	425.002
Parkers Glen, 4.6 mi S. of; at DeRialp place; near Twin Lakes; on W. side of rd.; 37 ft N. of barn; in field; in top of embedded boulder; standard tablet stamped "1369" (Reported not found, 1957)	1368.390
Parkers Glen, 1.9 mi S. of, along Twin Lakes Road; at residence of Joe Wood; 100 ft E. of stream crossing; on E. side of rd.; in NW. corner of concrete porch; standard tablet stamped "1055"	1054.467
Milford, 3.0 mi SW. of, along Blooming Grove Road; in W. end of S. abutment of iron bridge over Raymond Kill; in bridge seat; standard tablet stamped "828"	827.801
Milford, 6.0 mi SW. of; 2.0 mi W. of McCarthys Corner; on S. side of Blooming Grove Road; 100 ft NW. of Hildebrand house; in small outcropping ledge; standard tablet stamped "1189"	1188.441
Frenchtown, 1.4 mi SE. of; 90 ft W. of forks of Frenchtown and Sawkill Roads; on N. side of right-of-way; in outcropping ledge; standard tablet stamped "1294"	1293.540
Frenchtown, 1.4 mi NW. of, along U. S. Highway 6, Owego Road; 135 ft E. of junction of Frenchtown Road; near old ruins; on S. side of right-of-way; in top of embedded boulder; standard tablet stamped "1393"	1392.323
Milford, 8.8 mi SW. of, along Blooming Grove Road; 1.2 mi W. of forks of private rd. to residence of J. G. Hilliard; 0.6 mi by rd. NE. of Dark Swamp School; 60 ft SW. of deserted house at Drake Place; 25 ft N. of rd.; in field; in outcropping ledge; standard tablet stamped "1295"	1294.356
Edgemere Ranger Station, 150 ft S. of; 100 ft W. of bridge over Little Bush Kill; in NE. angle of rd. forks; in rock in place; standard tablet stamped "PRIM TRAV STA NO 1 1913"	1279.821
Lackawaxen; 400 ft NW. of Erie RR. station; 50 ft NE. of forks of rd. to Delaware River bridge; on W. edge of rd.; in stone wall; standard tablet stamped "PRIM TRAV STA NO 2"	637.367

LINE 1.

F. A. Dovholuk, 1957; Book AV 578

12	6	1.81	Reference mark; 60 ft SE. of tablet; top of 2- by 3-ft boulder; chiseled square	917.87
12	6	1.81	Millrift, 1.5 mi S. of; 23 ft N. and 33 ft W. of, and 5 ft higher than center of rd. intersection N.; set in center of 4- by 4-ft rock in place; standard tablet stamped "131 FAD 1957 924"	923.870

1957

LINE 1 (Cont'd.)Feet

12	8	2.98	U.E., at entrance to State Forest; 12 ft N. and 4 ft E. of, and 1 ft lower than center of old rd. NW.; in S. base of 1-ft oak tree; copper nail and washer	1146.30
12	11	4.73	Reference mark; 50 ft NW. of tablet; N. base of 16-in. maple tree; copper nail	1220.49
12	11	4.73	Millrift, 4.6 mi S. of; Milford, 2.5 mi NE. of, thence 2.8 mi N.; about 125 ft E. of Lake Ariel Camp; 10 ft E. of sign marking entrance to State Forest lands; on E. side of rd.; in concrete post; standard tablet stamped "132 FAD 1957 1219"	1219.190
12	13	5.85	U.E., 26 ft S. and 12 ft W. of, and level with center at intersection of dirt rd. W.; top of rock in place; chiseled square	986.50
12	15	6.80	U.E., 35 ft SE. of SE. corner of swimming pool; 18 ft W. and 2 ft higher than centerline; in center of 2- by 3-ft boulder; chiseled square	734.99
12	17	7.45	Milford; 2.5 mi NE. of courthouse, along old U. S. Highway 209; about 300 ft NW. of present hwy.; on top of NW. end of NE. concrete abutment of concrete bridge over Cummins Creek; 13 ft NW. of centerline of hwy.; level with bridge floor; PDH standard disk stamped "438 (P.D.H.)" (Tied by NGS, 1932)	437.791

LINE 2.

F. A. Dovholuk, 1957; Book AV 578

12	22	0.00	Milford; at County Courthouse; on top of water table at NE. side of building; 28.2 ft NW. of SE. corner of bldg.; 2.7 ft above ground; standard tablet stamped "C 91 1921 503" (Tied by NGS, 1932)	502.771
12	24	1.51	U.E., 35 ft N. and 4 ft E. of, and 1 ft lower than center at intersection of T-rd. NE. with Pa. Highway 6; SW. corner of concrete catch basin; chiseled square	806.56
12	25	2.24	Milford, 2.0 mi NW. of, along rd. to Buckhorn Ridge; 25 ft S. and 10 ft W. of, and 3 ft lower than center at T-rd. NE.; about 250 ft NW. of Olmstead dwelling; 10 ft SW. of fence corner; in concrete post; standard tablet stamped "133 FAD 1957 892"	892.067
12	25	2.24	Reference mark; 80 ft NE. of tablet; SW. cornerstone of red building; chiseled square	897.167
12	27	3.15	U.E., 26 ft N. and 30 ft E. of, and 6 ft higher than center at drive to E.; on top of 2- by 2-ft boulder; chiseled square	1114.51
12	29	4.05	U.E., 18 ft S. and 10 ft W. of, and level with center at old rd. to SW.; on center of boulder; chiseled square	1273.91

LINE 2 (Cont'd.)

1957

feet

12 31	5.55	Reference mark; 60 ft NW. of tablet; center of 2- by 2-ft boulder; chiseled square	1381.59
12 31	5.55	Milford, 5.3 mi NW. of, along rd. to Buckhorn Ridge; 26 ft E. and 2 ft higher than center of drive NE. to No. 2 Temporary Camp; center of 3- by 2-ft boulder; standard tablet stamped "134 FAD 1957 1385"	1384.558
12 35	6.94	U.E., centerline at trail intersection W.; on center of 6- by 6-ft rock; chiseled square	1296.96
12 42	9.29	"P 10 1932" (NGS)	575.333

LINE 3.

F. A. Dovholuk, 1957; Book AV 578

12 45	0.00	"M 10 1932 402.348" (NGS)	402.348
12 51	2.04	Milford, 5.5 mi SW. of, thence 0.9 mi NW.; Dingmans Ferry, 2.5 mi N. of; 2 ft N. and 30 ft E. of, and ft higher than center at intersection of rd. NW. with NE.-SW. rd.; in concrete post; standard tablet stamped "135 FAD 1957 883"	882.492
12 54	3.09	U.E., at water wheel mill; S. end of E. retaining wall; chiseled square	710.76
12 58	5.43	Reference mark; 120 ft W. of tablet; NE. corner of concrete walk; chiseled square	931.68
12 58	5.43	Dingmans Ferry, 3.6 mi NW. of; 55 ft N. and 18 ft E. of, and 1 ft lower than center of crossroad at Albrights Corner; 4 ft W. of power pole; in concrete post; standard tablet stamped "136 FAD 1957 930"	932.528
12 59	6.24	U.E., at bridge; W. end of concrete guardrail; chiseled square	940.893
12 63	7.95	Reference mark; 60 ft SE. of tablet; SW. base of 1-ft hickory tree; copper nail	999.77
12 63	7.95	Dingmans Ferry, 3.6 mi NW. of, thence 3.2 mi N.; Milford, 4.4 mi SW. of; 17 ft N. and 33 ft W. of, and 2 ft higher than center at intersection of rd. W. with NE.-SW. gravel rd.; 2 ft NW. of stone wall; in concrete post; standard tablet stamped "137 FAD 1957 1003"	1002.878
12 65	9.01	U.E., 20 ft S. and 18 ft W. of, and level with center at intersection of rd. NW.; NW. base of 16-in. hickory tree; copper nail	899.06
12 66	9.81	Milford, 3.1 mi SW. of; in SW. corner of bridge over Raymond Kill Brook; PDH standard disk stamped "138 FAD 1957 USGS"	842.464

1957

LINE 3 (Cont'd.)Feet

12	68	10.91	U.E., 10 ft N. and 4 ft E. of, and level with center at drive N. to Bubbling Springs; top of rock; chiseled square	889.18
12	72	12.34	Milford, 4.5 mi W. of; 4 ft N. and 17 ft E. of, and 2 ft higher than center at intersection of gravel rd. NW. to John D. Hoffman's home with NE.-SW. blacktop rd.; 2 ft NW. of fenceline; in concrete post; standard tablet stamped "139 FAD 1957 1280"	1279.634
12	77	14.53	Reference mark; 40 ft E. of tablet; SW. corner of flat rock; chiseled square	1171.42
12	77	14.53	Milford, 3.5 mi NW. of (airline distance); 79 ft S. and 18 ft E. of, and 1 ft higher than center at drive S. to the Hommel's residence; 3 ft E. of power pole; in concrete post; standard tablet stamped "140 FAD 1957 1169"	1169.340
12	79	15.31	U.E., E. corner of NW. retaining wall at two ponds; chiseled square	1233.56
13	1	16.27	Milford, 4.6 mi NW. of, thence 0.50 mi SW.; about 100 ft NW. of drive to Jersey Y-camps; in NW. corner of bridge; PDH standard disk stamped "141 FAD 1957 USGS"	1155.502
13	3	17.08	U.E., 56 ft N. and 41 ft W. of, and 3 ft higher than center at intersection of rd. NE. to Twin Lakes; N. end of W. headwall; chiseled square	1355.856
13	5	18.28	Reference mark; 40 ft E. of tablet; top of 4- by 6-ft boulder; chiseled square	1372.41
13	5	18.28	Milford, 5.2 mi NW. of, thence 1.3 mi N.; about 0.2 mi S. of Twin Lakes; 105 ft N. and 50 ft W. of, and 4 ft higher than center at entrance NW. to Sagamore; 14 ft E. of 18-in. oak tree; top of rock; standard tablet stamped "142 FAD 1957 1372"	1371.805
13	6	19.29	U.E., 15 ft E. and level with center at T-rd. W.; S. end of flat rock; chiseled square	1388.48
13	10	20.80	U.E., 12 ft W. of centerline at gasline; top of ledge; chiseled square	1360.55
13	15	22.83	Reference mark; 100 ft N. of tablet; W. end of boulder	1180.53
13	15	22.83	Milford, 4.2 mi NW. of; about 0.3 mi NW. of Hilltop Lake; 47 ft S. and 1 ft higher than center at dim rd. to NW.; set in center of 6- by 4-ft boulder; standard tablet stamped "143 FAD 1957 1181"	1180.931
13	17	23.80	U.E., at bridge over drain from N.; E. end of N. guardrail; chiseled square	959.30
13	20	25.40	"133 FAD 1957 892" (Described in line 2)	892.067

1957

LINE 4.Feet

		F. A. Dovholuk, 1957; Book AV 578	
13 34	0.00	Montague Township; on SE. side of rd.; about 0.58 mi NE. of intersection of Brick House-Milford Road and Brick House-Port Jervis Road; 28.5 ft SE. of centerline of rd.; 157.2 ft SE. of 24-in. maple tree; 20.3 ft NE. of crosscut on rock; at end of stone fence; 8.8 ft E. of N.J.P. and L. Co. pole #MG-49; NGS and State Survey standard disk stamped "2482"	512.745
13 37	2.83	Montague Township; 1.1 mi E. of fire house; 215 ft E. and 2 ft lower than intersection of rd. SW.; in S. concrete headwall of culvert; standard tablet stamped "144 FAD 1957 618"	618.246
13 39	3.82	U.E., NW. corner of bridge; chiseled square	752.92
13 41	4.96	Reference mark; 110 ft NE. of tablet; top of boulder; chiseled square	774.70
13 41	4.96	Montague; 1.1 mi E. of fire house, thence 1.2 mi SW.; Hainesville, 3.7 mi NE. of; 37 ft S. and 5 ft W. of, and 2 ft higher than center of crossroad; at four corners; N. corner of concrete well bed; standard tablet stamped "145 FAD 1957 774"	774.166
13 43	6.56	U.E., NE. of SE. bridge abutment; at small pond; chiseled square	666.00
13 44	7.01	Hainesville, 1.6 mi NE. of; about 0.2 mi N. of Bird Haven; set in W. end of N. bridge abutment at drain from pond E.; standard tablet stamped "146 FAD 1957 658"	658.033
13 46	8.11	U.E., at Hielle's residence; E. end of N. bridge abutment; chiseled square	855.12
13 49	9.66	U.E., at bridge; NW. end of SW. concrete guardrail; chiseled square	654.57
13 50	10.07	Hainesville, 0.1 mi E. of; set in NE. corner of bridge; at C. Agar residence; standard tablet stamped "147 FAD 1957 624"	624.421
13 55	12.28	Reference mark; 60 ft S. of tablet; in N. base of 1-ft walnut tree; copper nail	462.46
13 55	12.28	Hainesville, 1.7 mi W. of, thence 0.3 mi N.; 30 ft and 2 ft lower than center at rd. NW. to Rinckhoff farm; 3 ft N. of 20-in. cherry tree; in concrete post; standard tablet stamped "148 FAD 1957 460"	459.861
13 56	13.21	U.E., top of NE. guardpost at drain from SE.; chiseled square	445.04
13 57	14.23	Monument 2481, Montague Township; on NW. side of rd.; about 2.38 mi NE. of intersection of Old Mine Road and rd. to Hainesville; 23.5 ft NW. of centerline of rd.; 123.4 ft SE. of 30-in. walnut tree; 68.0 ft SE. of middle of old well; 8.7 ft W. of 15-in. walnut tree; in concrete post; NGS and State Survey standard disk not stamped	473.350

1963

LINE 5.Feet

D. S. Wright, 1963; Book AV 1302

1	53	8.59	U.E., 17 ft N. of, and about 1 ft lower than centerline of rd.; on NW. corner of concrete culvert; chiseled square	1002.37
1	54	8.97	U.E., 10 ft W. of, and level with centerline of rd.; on SW. corner of concrete wingwall of bridge over Balliard Creek; chiseled square	942.13
1	56	9.84	U.E., 17 ft E. of centerline of rd.; on large boulder; chiseled square	966.36
1	58	11.02	U.E., 30 ft NW. of, and about 2 ft lower than centerline of U. S. Highway 6 at T-rd. N.; on NW. corner of rock culvert; chiseled square	1191.39
1	59	11.50	U.E., 28 ft SW. of centerline of rd.; on SE. corner of L-shaped concrete culvert; chiseled square	1153.54
1	61	12.39	Greeley; 1.0 mi E. of post office, along State Highway 37, thence 2.0 mi S. along dirt rd. to U. S. Highway 6, thence 1.4 mi SE. along Highway 6; 13 ft SW. of, and 0.5 ft lower than centerline of rd.; in NW. corner of N. wingwall of concrete bridge over small drain; PDH standard disk stamped "10 DSW 1963 USGS"	1231.338
1	62	12.91	"41 236 1959" (NGS)	1348.088

LINE 6.

D. S. Wright, 1963; Book AV 1302

2	4	0.00	"U.E., chiseled square" (Described in line 5)	942.13
2	5	0.66	U.E., 12 ft E. of centerline of rd.; on large rock; chiseled square	1151.49
2	7	1.12	Greeley; 0.2 mi SW. of White Pine Park Hotel, thence 1.0 mi E. along State Highway 37 to rd. fork NW., thence 0.9 mi NW. along dirt rd.; 27 ft NW. of centerline of rd. at private drive E.; 2.6 ft W. of telephone pole 23218; in concrete post projecting about 0.2 ft above ground; standard tablet stamped "11 DSW 1963"	1183.602
2	8	1.84	U.E., 10 ft E. of, and about 1 ft higher than centerline of rd.; on large rock; chiseled square	1265.93
2	9	2.36	U.E., 22 ft E. of, and about 2 ft lower than centerline of rd.; on large rock; chiseled square	1303.32

1963

LINE 6 (Cont'd.)Feet

2	12	3.23	Reference mark; 25 ft N. of tablet; on large rock; chiseled square	1064.21
2	13	3.25	Greeley; 2.0 mi N. of Lutheran Church, along macadam rd. leading to Lackawaxen; 87 ft SE. of rd. fork SE.; 18 ft NE. of centerline of rd.; in concrete post projecting 0.5 ft above ground; standard tablet stamped "12 DSW 1963 1063"	1063.198
2	14	3.76	U.E., 28 ft W. of centerline of rd.; on large rock; chiseled square	955.34
2	15	4.22	U.E., 15 ft W. of, and about level with centerline of rd.; on NW. end of concrete culvert; chiseled square	861.31
2	18	5.73	"W 149 1941" (NGS)	650.999

LINE 7.

D. S. Wright, 1963; Book AV 1302

2	48	1.73	U.E., 20 ft S. of, and about level with centerline of rd.; on SW. corner of concrete culvert; chiseled square	1429.61
2	50	2.78	Reference mark; 13 ft NW. of tablet; on NW. end of concrete culvert over Wild Meadows Brook; chiseled square	1361.77
2	51	2.80	Hawley, about 8.5 mi SE. of, to Good Shepherd Church, thence 3.4 mi E. along macadam rd. to Lords Valley, thence 6.4 mi S. along macadam rd. to Meadow Brook; 23 ft SE. of, and about 0.6 ft lower than centerline of rd.; in SE. wingwall of culvert over Wild Meadow Brook; standard tablet stamped "17 DSW 1963 1361"	1360.848
2	54	4.38	Lords Valley, about 8.0 mi S. of, along macadam rd. to junction of rd. fork NE. to Milford; 172 ft NE. and 47 ft W. of centerline of rd. at junction of rd. NE.; in concrete post projecting about 0.2 ft above ground; standard tablet stamped "18 DSW 1963 1311"	1311.343
2	55	4.98	U.E., 22 ft S. of, and 0.5 ft lower than centerline of rd.; on SW. corner of concrete culvert over small drain; chiseled square	1310.48
2	59	6.54	Lords Valley, 10.2 mi SE. of, along macadam rd. to T-rd. SW. leading to Y.M.C.A. Camp Speers; 42 ft SW. and 28 ft W. of centerline of rd. leading to camp; in concrete post projecting about 0.4 ft above ground; standard tablet stamped "19 DSW 1963 1342"	1342.045
2	60	6.99	U.E., 55 ft N. of junction of Y-rd.; on top of drainpipe; chiseled square	1400.42
2	61	7.56	U.E., 12 ft E. of centerline of rd.; in root on E. side of maple tree; copper nail and washer	1357.62

1963

LINE 7 (Cont'd.)Feet

2	62	7.99	Reference mark; 9 ft S. of tablet; on SW. corner of cement plate over sewer; chiseled square	1285.31
2	63	8.02	Lords Valley, 10.2 mi SE. of, along macadam rd. to junction of T-rd. SW., thence 1.5 mi S. to Camp Speers; in NE. corner of concrete plate over sewer; standard tablet stamped "20 DSW 1963 1285"	1285.338
2	64	8.48	U.E., 29 ft NW. of centerline of rd. at junction of woods rd. NW.; in root on SE. side of oak tree; copper nail and washer	1306.14
2	66	9.36	Porter Lake Outlet, 6.9 mi NE. of, along macadam rd. leading to Silver Lake; 12.5 ft S. of, and level with centerline of rd.; in SW. wingwall of concrete bridge over Townsend Creek; PDH standard disk stamped "21 DSW 1963 USGS"	1222.774
2	68	10.46	U.E., 15 ft S. of, and about level with centerline of rd.; on SW. corner of culvert; chiseled square	1309.19

LINE 8.

D. S. Wright, 1963; Book AV 1302

3	13	0.00	"L 236 1959" (NGS)	1393.252
3	17	1.90	Shohola Falls, about 2.5 mi SE. of, along U. S. Highway 6, thence 1.8 mi N. along T-rd. N.; 19 ft W. of centerline of rd.; 9 ft NW. of fence corner; in concrete post projecting 0.4 ft above ground; standard tablet stamped "23 DSW 1963 1375"	1375.199
3	20	3.28	U.E., 19 ft E. of centerline of rd.; in root on S. side of twin hickory tree; copper nail and washer	1359.53
3	21	3.88	Shohola Falls, about 2.5 mi SE. of, along U. S. Highway 6, thence 3.8 mi N. along rd. leading to Walker Lane; 31 ft E. of centerline of rd.; in concrete post projecting about 0.4 ft above ground; standard tablet stamped "24 DSW 1963 1336"	1336.539
3	23	4.77	U.E., 22 ft E. of centerline of rd.; on large rock; chiseled square	1238.69
3	26	6.09	U.E., 28 ft W. of centerline of rd.; on flat rock; chiseled square	929.67
3	27	6.56	Shohola Falls, about 2.5 mi SE. of, along U. S. Highway 6, thence 6.5 mi N. along rd. leading to Shohola; 65 ft SE. of junction of Y-rd., thence 44 ft S. of centerline of rd.; in concrete post projecting 0.4 ft above ground; standard tablet stamped "25 DSW 1963 793"	793.354
3	32	9.35	"Z 149 1941" (NGS)	649.644

1964

LINE 9.Feet

H. W. Clarkson, 1964; Book AV 1302

6	3	0.00	"19 DSW 1963 1342" (Described in line 7)	1342.045
6	4	0.99	U.E., 46 ft N. of, and 4 ft higher than centerline of private drive E.; on top of 24-in. boulder; chiseled square	1186.66
6	9	2.83	"136 FAD 1957 930" (Described in line 3)	932.528

LINE 10.

H. W. Clarkson, 1964; Book AV 1302

6	12	0.00	"Y 149 1941" (NGS)	647.518
6	13	1.02	Barryville, 0.5 mi N. of, along State Highway 55; 20 ft W. of centerline of rd.; in 4- by 4-ft concrete culvert; standard tablet stamped "1 HBC 1964 655"	654.895
6	16	2.22	Barryville, 1.8 mi N. of, along State Highway 55; 2.3 mi S. of Eldred; 20 ft S. and 12 ft N. of, and level with centerline of rd. at stream; in SW. wingwall; standard tablet stamped "2 HBC 1964 814"	814.471
6	26	7.83	Eldred, 3.6 mi SE. of, along County Road 32; 1.8 mi NW. of Glen Spey; 89 ft N. and 50 ft W. of, and 6 ft higher than centerline of rd. at junction of Y-rd. W.; in W. concrete headwall; standard tablet stamped "7 HBC 1964 1219"	1218.527
6	28	9.09	Glen Spey, 0.6 mi NW. of, along County Road 32; 3 ft S. and 13 ft W. of, and 1 ft higher than centerline of rd. at drain E.; in SW. concrete headwall; standard tablet stamped "8 HBC 1964 1289"	1289.147
6	30	10.08	Glen Spey, 0.4 mi N. of, along County Road 42; 34 ft N. and 75 ft E. of, and 2 ft lower than centerline of rd. at private drive NW.; on SE. side of rd.; in top of steps to small white house; standard tablet stamped "9 HBC 1964 410"	1409.624
6	32	11.01	Glen Spey, 1.1 mi N. of, along County Road 42, thence 0.3 mi NE. along paved rd.; 48 ft N. of, and 2.5 ft higher than centerline of rd. at woods clearing SE.; in large boulder; standard tablet stamped "10 HBC 1964 1454"	1453.970
6	34	12.03	Glen Spey, 1.1 mi N. of, along County Road 42, thence 0.9 mi NE. along paved rd., thence 0.4 mi SE. to radio tower on E. side of rd.; 23 ft N. and 126 ft E. of, and 1.5 ft higher than centerline of rd. at drive E.; in SE. corner of concrete base to tower; standard tablet stamped "11 HBC 1964 1467"	1467.460

1964

FeetLINE 10 (Cont'd.)

6	36	13.00	Glen Spey, 1.1 mi N. of, along County Road 42, thence 0.9 mi NE. along paved rd., thence 1.4 mi SE.; 30 ft N. and 10 ft W. of NW. corner of porch of two-story house; 0.5 ft lower than ground; NW. corner of concrete base of well; standard tablet stamped "12 HBC 1964 1403"	1402.774
6	38	14.20	Glen Spey, 2.2 mi SE. of, along County Road 31; 57 ft N. and 64 ft E. of, and 7 ft higher than centerline of rd. at junction of Y-rd. N.; in large boulder; standard tablet stamped "13 HBC 1964 1169"	1168.771
6	40	15.23	Glen Spey, 3.3 mi SE. of, along County Road 31; 2.3 mi N. of Mongaup, along County Road 31; 28 ft S. and 46 ft E. of, and 9 ft lower than centerline of rd. at drive W.; in boulder flush with ground; standard tablet stamped "14 HBC 1964 904"	904.099
6	43	16.29	Mongaup, 1.2 mi N. of, along County Road 31; 40 ft S. and 21 ft W. of, and 1 ft higher than centerline of rd. at drain; in concrete post; standard tablet stamped "15 HBC 1964 693"	693.381
6	45	17.14	Mongaup, 0.3 mi N. of, along County Road 31; 3 ft S. and 24 ft W. of, and 2 ft lower than centerline of rd. at private drive NW.; in S. concrete corner of 5- by 5-ft sewage drain; standard tablet stamped "16 HBC 1964 522"	522.438
6	47	18.06	Mongaup, 0.6 mi W. of, along State Highway 97; 27 ft N. and 12 ft E. of, and 5 ft lower than centerline of rd. at drain; in center of concrete culvert; standard tablet stamped "17 HBC 1964 493"	493.260
6	48	19.18	Mongaup, 1.8 mi W. of, along State Highway 97; 31 ft N. and 22 ft E. of, and 1 ft higher than centerline of rd. at woods rd. N.; in SW. corner of concrete culvert; standard tablet stamped "18 HBC 1964 501"	500.616
6	49	20.14	Mongaup, 2.8 mi W. of, along State Highway 97; 1.7 mi E. of Pond Eddy; 117 ft N. and 10 ft W. of, and 3 ft lower than centerline of rd. at woods rd. E.; in center of E. concrete headwall; standard tablet stamped "19 HBC 1964 516"	516.180
6	50	21.09	Pond Eddy, 0.8 mi E. of, along State Highway 97; 24 ft N. and 23 ft E. of, and 7.5 ft lower than centerline of rd. at drain; in center of NE. concrete headwall; standard tablet stamped "20 HBC 1964 515"	514.646
6	51	22.05	Pond Eddy, 0.2 mi SE. of, across bridge; 8 ft N. and 26 ft W. of, and 0.5 ft higher than centerline of rd. at junction of T-rd. NW.; in S. wingwall of bridge over Delaware River; standard tablet stamped "21 HBC 1964 539"	539.474
6	52	22.60	"P 10 1932" (NGS)	575.333